# **PCT**

# WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6:		(11) International Publication Number: WO 96/23005
C08F 4/60, 10/00	A1	(43) International Publication Date: 1 August 1996 (01.08.96)
<ul> <li>(21) International Application Number: PCT/US:</li> <li>(22) International Filing Date: 2 January 1996 (c)</li> <li>(30) Priority Data: 08/378,202 25 January 1995 (25.01.95) 08/544,051 17 October 1995 (17.10.95)</li> <li>(71) Applicant: W.R. GRACE &amp; COCONN. [US/URANGE Avenue of the Americas, New York, NY 10036 (c)</li> <li>(72) Inventors: WARD, David, George; 8408 Woodlan Drive, Laurel, MD 20724 (US). CARNAHAN, Malott; Apartment No. 302, 5635 Columbia Road bia, MD 21044 (US).</li> <li>(74) Agent: CAPRIA, Mary, Ann; W.R. Grace &amp; CoCon Grace Drive, Columbia, MD 21044 (US).</li> </ul>	O2.01.9  [ [ ] S]; 11 US).  Ind Man Edmun  Ind Column  Ind Column	CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AZ, BY, KZ, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  Published  With international search report.  Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

## (54) Title: A SUPPORTED CATALYTIC ACTIVATOR

#### (57) Abstract

A supported polyolefin catalyst activator, comprising a four coordinate anion having a direct chemical bond to a catalyst carrier, wherein said anion is comprised of a neutral, three coordinate compound, MR<sub>3</sub>, and a carrier having oxygen containing functionalities, wherein M is selected from the group comprising boron, tellurium, aluminum, gallium, indium and mixtures thereof, and R's can be the same or different and are selected from the group comprising alkyls, alkoxys, alkenyls, halogen substituted alkyls, alkoxys, and alkenyls, aryls, aryl halides, halides and mixtures thereof; and a cation counter ion to said anion, wherein said cation is a protonated base or a Lewis Acid capable of protonating or abstracting a moiety, such as an alkyl or aryl, from a transition metal containing catalyst precursor resulting in a cationic transition metal species.

# FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungury	NO	Norway
BF	Burkina Faso	1E	Ireland	NZ	New Zealand
		iT	lialy	PL	Poland
BG	Bulgaria	JP	Japan	PT	Portugal
BJ	Benin	KE	Kenya	RO	Romania
BR	Brazil	KG	Kyrgystan	RU	Russian Federation
BY	Belarus	KP	Democratic People's Republic	SD	Sudan
CA	Canada	~	of Korea	SE	Sweden
CF	Central African Republic	KR	Republic of Korea	SG	Singapore
CG	Congo	KZ	Kazakhstan	SI	Slovenia
CH	Switzerland	LI LI	Liechtenstein	SK	Slovakia
CI	Côte d'Ivoire		Sri Lanka	SN	Senegal
CM	Cameroon	LK		SZ	Swaziland
CN	China	LR	Liberia	TD	Chad
CS	Czechoslovakia	LT	Lithuania	TG	
CZ	Czech Republic	LU	Luxembourg		Togo
DE	Germany	LV	Larvia	<u>TJ</u>	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	us	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

#### A SUPPORTED CATALYTIC ACTIVATOR

This application is a continuation-in-part of U.S. Patent No. 08/378,202, filed January 25, 1995.

5

10

15

20

### Field of Invention

The invention relates to catalyst activator compositions, to a method for preparing such catalyst activator compositions, to a method of using such catalyst activator and to polymer products produced with such catalyst compositions using the present activator. More particularly, this invention relates to compositions, comprising supported ionic catalyst activator compositions useful to activate polyolefin catalysts to polymerize olefins, diolefins and/or acetylenically unsaturated monomers to homopolymer, copolymer and terpolymer products.

#### Background Of The Invention

Ziegler-Natta (Z-N) and metallocene-alumoxane type catalyst systems for the polymerization of olefins are well known in the art. Recently a new, ionic pair type of catalyst has been developed which yields polymers of improved properties compared to those made with conventional catalyst systems.

25

30

These systems typically use Group IV-B metallocene catalysts prepared as a reaction product of a Group IV-B metal metallocene compound and an ionic activator compound. U.S. Patent No. 5,241,025 teaches the use of a catalyst system comprising a Group III-A element compound comprising a cation capable of donating a proton which will irreversibly react with at least one ligand contained in the Group IV-B metal compound and an anion which is

- 2 -

bulky, labile and non-coordinatable with the Group IV transition metal cation produced upon the reaction of the metallocene and activator compound. Similarly, U.S. Patent No. 5,198,401 teaches that ionic catalyst compositions can be prepared by combining two components, bis(cyclopentadieny) Group IV-B metal complex containing at least one ligand which will combine irreversibly with the second component or at least a portion thereof such as a cation portion thereof. The combination of the two components produces an ionic catalyst composition comprising a cationic bis(cyclopentadienyl) Group IV-B metal complex which has a formal coordination number 3 and a 4+ valence charge and the aforementioned noncoordinating anion. Both of these U.S. Patents are directed to homogenous metallocene polyolefin catalyst systems. Use of these catalyst systems in other reactor designs, particularly slurry reactors, can result in reactor fouling, poor productivities, poor polymer bulk densities, and poor polymer particle morphologies. For these reasons, it is desirable to develop heterogeneous versions of these ion pair cocatalysts, where the cocatalyst is deposited on a carrier, preferably an oxide such as silica or alumina.

10

15

20

25

30

An example of a supported ion pair catalyst system is taught in WO 94/03506, wherein a support which had been modified with an alkyl aluminum reagent is treated with a solution of a metallocene catalyst and an anionic activator, and the solvent is removed. The resulting catalyst system provided a low activity heterogeneous ion pair catalyst system. Because there is no direct chemical bond between the catalyst ion pair and the support,

- 3 -

resolubilization of the catalyst may make this system unsuitable for slurry reactors.

5

10

15

20

25

30

WO 93/11172 discloses the use of certain polyanionic transition metal catalyst compositions wherein the polyanionic moiety comprises a plurality of metal or metalloid atoms - containing non-coordinating anionic groups pendant from and chemically bonded to a core component through use of a carbon containing a spacer between the metal or metalloid atoms and the core component. However, WO 93/11172 teaches to avoid exposing its activator to high concentrations of functionalities which are known poison for metallocene polymerization catalysts and in fact, teaches the necessity of masking reactive functionalities on a support, such as hydroxylgroups on silica.

The present invention overcomes the above mentioned problems and provides further improvements to catalytic systems by providing a catalyst activator chemically bound directly to the support, reducing resolubilization of heterogenous catalysts and therefore minimizing reactor fouling. Furthermore, the present invention further permits the use of supports having high concentrations of chemical functionalities that would otherwise act as poisons to metallocene catalysts.

In addition, the direct bond between the support and the catalyst activator provides a large support effect, allowing properties of the activator to be altered by modifying the support and consequently, permitting the support to influence the polymer morphology.

Furthermore, catalyst systems containing the present activator produce a high bulk density polyethylene. The high bulk products cost less to ship to end users, flow

- 4 -

better in molding operations and eliminates the need to pelletize what would otherwise have been a resin fluff.

Additionally, multi-modal polyolefin resins may be prepared using the supported catalytic activator of the present invention with a mixture of catalysts, including chromium, Ziegler-Natta and metallocene catalysts.

5

10

15

20

25

30

#### Summary Of The Invention

The present invention meets the above objectives by providing an improved supported catalyst activator. The invention further provides unique catalyst activator compositions suitable for use with multiple catalysts, permitting the support to influence polymer morphology and reducing fouling of polymerization equipment.

The present invention is directed to a supported catalyst activator comprising a four coordinate anion species having a direct chemical bond to a catalyst carrier wherein said anion species is comprised of a neutral three coordinate compound, MR, and a support having oxygen containing functionalities, wherein the M is selected from the group consisting of boron, tellurium, aluminum, gallium and indium and mixtures thereof and the R's may be identical or different and are selected from the group consisting of alkyls, halogen substituted alkyls, aryls, arylhalides, alkenyls, alkoxy and halides and mixtures thereof; and a cation to this anion wherein said cation is a protonated base or a Lewis Acid, including hydrogen cation, capable of protonating or abstracting a moiety, such as an alkyl, aryl, or halogen moiety, from a transition metal containing catalyst precursor resulting in a cationic transition metal species.

The invention further includes methods of producing the supported catalyst activator and the polymers produced from polymerizing monomers in contact with the resulting catalyst system incorporating the activator of the present invention.

- 6 -

The present invention is directed to a supported catalyst activator comprising an anion species having a direct chemical bond to a catalyst support having oxygen containing functionalities; wherein said anion species having the general formula MR, wherein the M is selected from the group consisting of boron, tellurium, aluminum, gallium and indium and mixtures thereof and the R's are independent and selected from the group consisting of alkyls, alkenyls, halogen substituted alkyls, aryls, arylhalides, alkoxy and halides and may be the same or different; and a cation to this anion wherein said cation is a protonated base or a Lewis Acid, including hydrogen cation, capable of protonating or abstracting a moiety, such as an alkyl, aryl, halogen from a transition metal containing catalyst precursor resulting in a transition metal cation.

One possible structure for this type of species is shown below.

#### [C] [MR,-O-Support]

20

25

30

5

10

15

Where, [C] is an activating cation, which may be a Bronsted acid capable of donating a proton to the transition metal catalytic precursor resulting in a transition metal cation. Such Bronsted acids include but are not limited to ammoniums, oxoniums, phosphoniums and mixtures thereof; preferably ammoniums of methylamine, aniline, dimethylamine, diethylamine, N-methylaniline, diphenylamine, trimethylamine, triethylamine, N,N-dimethylaniline, methyldiphenylamine, pyridine, p-bromo-N,N,-dimethylaniline, p-nitro-N,N-dimethylaniline; phosphoniums from triethylphosphine, triphenylphosphine and diphenylphosphine; oxoniums from ethers such as

10

15

20

25

30

dimethyl ether, diethyl ether, tetrahydrofuran and dioxane; sulfoniums from thioethers such as diethyl thioethers and tetrahydrothiophene; and mixtures of the foregoing; most preferably dimethylanilinium.

Furthermore, [C\*] may be an abstracting moiety that is capable of reacting with a transition metal catalytic precursor resulting in the transition metal cation.

Acceptable abstracting moiety include but are not limited to silver, carboniums, tropylium, carbeniums, ferroceniums and mixtures thereof; preferably carboniums and ferroceniums and mixtures thereof; and most preferably triphenyl carbonium. The [C\*] may also include mixtures of the Bronsted acids and the abstracting moiety species as described herein.

R can be the same or independent and are selected from the group comprising halogen (including chlorine, bromine, fluorine, iodine and mixtures thereof, preferably chlorine and fluorine), mono or multi-cyclic (including halosubstituted) aryls, alkyls, and alkenyl compounds and mixtures thereof; preferred are C1-C20 alkenyl groups (such as ethenyl, propylenyl, butenyl, and pentenyl); C1-20 alkyl groups (such as a methyl, ethyl, n-propyl, iso-propyl, n-butyl, n-octyl, and 2-ethylhexyl groups), C6-20 aryl group (including substituted aryls) (such as phenyl, p-tolyl, benzyl, 4-t-butylphenyl, pentaflurophenyl, 2,6 dimethylphenyl, 3,5- methylphenyl, 2,4-dimethylphenyl, 2,3-dimethylphenyl, pentafluorobenzyl groups); C1-C20 alkoxy (such as ethoxy, butoxy, t-butoxy, n-butoxy) and mixtures thereof. More preferred R groups are C1-C5 alkyls, phenyl and napthyl and mixtures thereof.

- 8 -

M is selected from the group comprising boron, aluminum, gallium, indium, tellurium and mixtures thereof;
O is oxygen; and

Support is a carrier or support defined as inorganic carriers, inorganic oxide carriers, and organic carriers. Of these, inorganic carriers and inorganic oxide carriers are particularly preferably.

5

10

15

20

25

30

Inorganic oxide carriers include SiO, Al,O, MgO, ZrO, TiO, Fe,O, B,O, CaO, ZnO, BaO, ThO, and mixtures thereof such as silica alumina, silica alumina titania, zeolite, ferrite and [glass fibers, any O]. In addition, the above-mentioned inorganic oxide carriers may contain a small amount of carbonates, nitrates, sulfides or the like.

Additional carrier materials include aluminum phosphate gel materials as well as polymeric or organic supports containing reactive functionalities such as polyvinylalcohol, poly(methylmethacrylate) and hydroxy substituted polystyrene and mixtures of two or more of the foregoing.

Preferred carrier materials are silica or alumina based materials such as oxide of silica, and oxides of Si-Al, Si-Ti, Si-Al-Ti, SiMgCl<sub>2</sub>, and aluminum phosphate gel materials and mixtures thereof; and most preferred materials are silica, Si-Al, Si-Ti, Si-Al-Ti, and SiMgCl<sub>2</sub> materials and mixtures thereof.

The carriers suitable for this invention can be, but need not be calcined before use.

Preferably, the carriers are compositions conventionally used as a catalyst support material. The degree of porosity in the carrier may be any level that is achievable in the starting material. Preferably, the

PCT/US96/00644

5

10

15

20

25

30

carrier particles of the present invention have a pore volume of at least 0.3 cc/g; preferably from 0.3 to 5 cc/g; more preferably from 0.3 to 3 cc/g; and most preferably, the pore volume exceeds 1 cc/g. Preferably, the carrier particles have a surface area of about 1-1000 m²/g; preferably from 200 - 800 m²/g; and most preferably from 250 to 650 m²/g. The typical particle size for a suitable carrier for this invention is from 1 to 300 microns, preferably from 10 to 200 microns, more preferably from 20 to 100 microns.

Pore volume and surface area can be, for example, measured from volume of nitrogen gas adsorbed in accordance with BET method. (Refer to J. Am. Chem. Soc., vol. 60, p. 309 (1983)).

In the preferred embodiments of the present invention, the M is boron, aluminum or mixtures thereof, the support is calcined silica, the R is selected from the group comprising halosubstituted and non-substituted C1-C5 alkyls and C6-C18 aryls and mixtures thereof, and the cation is either an alkyl substituted ammonium salt or mixtures thereof; and preferably are dimethylanilinium, triphenylmethane cation and mixtures thereof.

In a preferred embodiment, the composition is a borate-modified support formed by the interaction of 1) a carrier, having a hydroxyl functionality including but not limited to silicas and aluminas; 2) a three coordinate boron or aluminum species; 3) a base; and 4) a cation that can serve to abstract an alkyl ligand from a metallocene alkyl.

Components 3) and 4) may result from the same chemical or a combination of two or more chemicals. The resulting modified support contains a four-coordinate

PCT/US96/00644

anionic species with a direct chemical bond to the support.

Examples of the boron species suitable for use in this invention include but are not limited to tri(phenyl)boron, tri(p-tolyl)boron, tri(o-tolyl)boron, tri(pentafluorophenyl)boron, tri(o,p-dimethylphenyl)boron, tri(m, m-di(trifluoromethyl) phenyl)boron, tri(ptrifluoromethylphenyl)boron, and the like; and mixtures of the foregoing.

Examples of the aluminum species suitable for use in this invention include but are not limited to tri(phenyl)aluminum, tri(p-tolyl)aluminum, tri(otolyl)aluminum, tri(pentafluorophenyl)aluminum, tri(o,pdimethylphenyl)aluminum, tri(m,m-

10

15

20

25

30

di(trifluoromethyl)phenyl)aluminum, tri(ptrifluoromethylphenyl) aluminum, and the like; and mixtures of the foregoing.

Examples of suitable bases for use in this invention is any base capable of deprotonating the carriers, and include, but are not limited to, the following species: metal hydroxides, metal alkyls and aryls, trialkylsubstituted amines such a triethylamine, tripropylamine, tri(n-butyl)amime, trimethylamine, and the like; N,Ndialkyl anilines such as N, N-dimethylaniline, N, N, diethylaniline, N,N,-2,4,6-pentamethylaniline and the like; dialkyl amines such as di-(isopropyl)amine, dicyclonexylamine and the like; triaryl phosphines such as tri(methylphenyl)phosphine and tri(dimethylphenyl)phosphine and the like; and mixtures of the foregoing.

One method for preparing the present composition comprises:

- 11 -

treating a catalyst support having the potential for nucleophilic oxygen sites, in an organic solvent, with a C1-C20 metal alkyl, C6-C20 metal aryl, substituted C1-C20 metal alkyls and C6-C20 metal aryls and mixtures thereof; wherein the metal in this reagent is selected from the group comprising Group 1 and 2 metals from the Periodic Table and mixtures thereof; preferably N-butyllithium, dibutylmagnesium, methyllithium, butylmagnesium chloride and mixtures thereof, which can react with the support surface to generate nucleophilic oxygen sites, and

5

10

- 2) adding a neutral, three coordinate metal component MR, as defined above, and
- adding an organic compound, which reacts with the 3) product metal component from step 2. Suitable organic compounds include those of the general formula R'X, capable of reacting to form a cation, 20 which in turn reacts with the transition metal The R' is selected from the catalyst precursor. group comprising hydrogen, and halosubstituted and nonsubstituted alkenyl, alkyl, aryl, or arylalkyl radicals having from 1-20 carbon atoms or two carbon 25 atoms joined together to form a part of C4 to C6 ring. X is any halogen, preferrably chlorine or bromine. A suitable organic compound includes pronated amides and ammonium salts as well. Preferred organic compounds are a halogen containing 30 compound such as chlorotriphenylmethane,

5

10

15

20

25

- 12 -

dimethylanilinium chloride, and mixtures of the foregoing.

The reagents are used in quantities that can be expressed in terms of mmol of reagent to gram of support. In steps 1), 2) and 3) the mmol of the added reagent (i.e., the metal alkyl and aryls, MR, and the organic compound respectively) are used in an amount ranging from 0.01-10.00 mmole:gram of support, preferably 0.10-1.0 mmol/gram, and more preferrably 0.5mmol:gram of support. Preferrably the amount of the reagents used in steps 2) and 3) are equal to or exceed that amount of reagent used in step 1).

Another method for preparing the present invention comprises the following steps which can be carried in any order:

- treating a catalyst support, preferably in an organic solvent with an organic base in solution, preferably of the formula R,N wherein N is nitrogen, and the R's are independently selected from the group comprising hydrogen, C1-C20 alkyl(preferably C3-C9), C6-C20 aryls (preferably C8-C14, substituted C1-C20 alkyls (preferably C3-C9) and C6-C20 aryls (preferably C8-C14), and may be the same or different; preferred amines are as dimethylaniline, tributylamine, triethylamine, and mixtures thereof, and
- adding a neutral material, MR, as defined above,

  The reagents are used in quantities that can be

  expressed in terms of mmol of reagent to gram of
  support. In steps 1) and 2) the mmol of the added
  reagent (i.e., the organic base and MR, respectively)

5

25

30

are used in an amount ranging from 0.01-10.00 mmole:gram of support, preferably 0.10-1.0mmol/gram, and more preferrably 0.5mmol:gram of support.

Preferrably the amount of the reagent used in step 2) is equal to or exceed that amount of reagent used in step 1).

Suitable organic solvents for either of these methods

include but are not limited to non-polar organic solvents. 10 Most preferably includes aliphatic hydrocarbons (typically C3 to C12, such as butane, isobutane, pentane, isopentane, hexane, octane, decane, dodecane, hexadecane, octadecane, and the like); alicyclic hydrocarbons (typically C5-C20, such as cyclopentane, methylcyclopentane, cyclohexane, decalin cycloctane, 15 norbornane, ethylcyclohexane and the like); aromatic hydrocarbons, including substituted aromatics such as benzene, chlorobenzene, xylene, toluene and the like; and petroleum fractions such as gasoline, kerosene, light oils, and the like. It may also be desirable to use 20 tetrahydrofuran or another ether. Mixtures of two or more solvents may also be used, e.q., Exxon's IsoPar ®

Either of these methods further includes the step of removing the solvent from the reaction product by any number of usual techniques, including evaporative and filtering techniques.

#### PREFERRED CATALYTIC PRECURSORS

The active olefin polymerization catalyst is formed by the interaction of the present supported catalytic activator with the transition metal catalyst precursor.

- 14 -

Such transition metal catalyst precursor compounds of the Group IV V, VI metal hydrocarbyloxides as described in WO 92/01006, metallocenes as defined herein, Group IV and other metal monocyclopentadienyl-heteroatom ligand compounds as described in U.S. Patent Nos. 5,005,438; 5,096,867; 5,057,475; and WO 92/12162.

The catalyst activator of the present invention is suitable for use with any polyolefin catalyst system, most preferably metallocene systems, but may also be useful in mixed Ziegler-Natta/Metallocene systems which may optionally include one or more chromium catalysts.

10

15

20

25

30

As used herein metallocene is defined as organometallic compounds having a transition metal, including rare earth metals, in coordination with members of at least one five-member carbon ring, heterosubstituted five-member carbon ring, or a bridged (ansa) ligand defined as multi cyclic moieties capable of coordinating to the transition or rare earth metals.

The ansa bridge can be selected from the group comprising carbon, silicon, phosphorus, sulfur, oxygen, nitrogen, germanium, species such as R2C, R2Si, R2Ge, R1,CR1,CR1,Si, R1,CR1,CR1,CR1,CR1,Si, R1,CR1,CR1,CR1,CR1,CR1,CR1,Si diradicals where R1 is independently selected from the group containing hydride, halogen radicals, and C1-20 hydrocarbyl radicals including ethyl and propyl; preferred ansa bridges are Me,Si (dimethylsilyl), Ph,Si (diphenylsilyl), Me,C (isopropylidene), Ph,P (diphenylphosphoryl) Me,SiSiMe, (tetramethyldisilane) and the like. Preferably, the ansa bridge has a length of two atoms or less as in methylene, ethylene, diphenysilyl, dimethylsilyl, propylidene and methylphenylsilyl.

10

15

20

25

30

The transition metal component of the metallocene is selected from Groups 3 through Group 10, 13-17 of the Periodic Table, lanthanides and actinides and mixtures thereof; preferably Group 3, 14, 15, 16 and lanthanides and actinides metals; and most preferably titanium, zirconium, hafnium, chromium, vanadium, samarium and neodymium. Of these Ti, Zr, and Hf are most preferable.

In one preferred embodiment, the metallocene catalyst is represented by the general formula  $(Cp)_m MR^4_n R^5_p$ , wherein Cp is a substituted or unsubstituted cyclopentadienyl ring, M is a Group 4, 14, 5, 15, 6 and 16 transition metal;  $R^4$  and  $R^5$  are independently selected halogen, hydrocarbyl group, or hydrocarboxyl groups having 1-20 carbon atoms; m=1-3, p=0-3 and the sum of m+n+p equals the oxidation state of M.

In another embodiment the metallocene catalyst is represented by the formulas:

 $(C_5R_m^6)_pR_a^7(C_5R_m^6)MeK_{3-p-x}$  and  $R_a^7(C_5R_m^6)_2MeK_a^7$ .

Wherein Me is a Group 4, 14, 5, 15, 6 or 16 transition metal;  $C_sR_m^6$  is a substituted cyclopentadienyl each  $R^6$ , which can be the same or different is hydrogen, alkenyl, aryl, or arylalkyl radical having from 1 to 20 carbon atoms or two carbon atoms joined together to form a part of a C4 to C6 ring;  $R^7$  is one or more of or a combination of a carbon, a germanium, a silicon, a phosphorous or a nitrogen atom containing radical substitution on and bridging two  $C_sR_m^6$  rings or bridging one  $C_sR_m^6$  ring back to Me, when p=0 and x=1 otherwise x is always equal to 0, each K which can be the same or different is an aryl alkyl, alkenyl, alkaryl, or arylalkyl radical having from 1-20 carbon atoms or

5

10

15

20

25

30

- 16 -

halogen, K' is an alkylidene radical having from 1 to 20 carbon atoms, s is 0 to 1 and when s is 0, m is 5 and p is 0, 1, or 2 and when s is 1, m is 4 and p is 1.

The transition metal component of the metallocene is selected from Groups 3 through Group 10, 13 through 17 and lanthanides and actionides of the Periodic Table and mixtures thereof, preferably Group 3, 4, 5, 6 and lanthanides and actinides metals, and most preferably titanium, zirconium, hafnium, chromium, vanadium, samarium and neodymium. Of these Ti, Zr, and Hf are most preferable.

In particular, preferred metallocenes are derivatives of a cyclopentadiene (Cp), including cyclopentadienyl, indenyl, fluorenyl, tetrahydroindenyl, and 1,1-disubstituted silacyclopentadienes, phosphocyclopentadienes, 1-metallocyclopenta-2,4-dienes, bis(indenyl)ethane and mixtures thereof.

Additional illustrative but non-limiting examples of metallocenes represented by the above definition are dialkyl metallocenes such as bis(cyclopentadienyl)titanium dimethyl, bis(cyclopentadienyl)titanium diphenyl, bis(cyclopentadienyl)zirconium dimethyl, bis(cyclopentadienyl)zirconium dimethyl, bis(cyclopentadienyl)hafnium dimethyl and diphenyl, bis(cyclopentadienyl)titanium dineopentyl, bis(cyclopentadienyl)zirconium di neopentyl, bis(cyclopentadienyl)zirconium dibenzyl, bis(cyclopentadienyl)zirconium dibenzyl, bis(cyclopentadienyl)vanadium dimethyl; the mono alkyl metallocenes such as bis(cyclopentadienyl)titanium methyl chloride, bis(cyclopentadienyl)ti

tanium ethyl chloride, bis(cyclopentadienyl)titanium

10

15

20

25

30

phenyl chloride, bis(cyclopentadienyl)zirconium methyl chloride,

bis(cyclopentadienyl)zirconium ethyl chloride, bis(cyclope ntadienyl)zirconium phenyl chloride, bis(cyclopentadienyl) titanium methyl bromide; the trialkyl metallocenes such as cyclopentadienyl titanium trimethyl, cyclopentadienyl zirconium triphenyl, and cyclopentadienyl zirconium trineopentyl, cyclopentadienyl zirconium trimethyl, cyclopentadienyl hafnium triphenyl, cyclopentadienyl hafnium trineopentyl, and cyclopentadienyl hafnium trimethyl; monocyclopentadienyls titanocenes such as, pentamethylcyclopentadienyl titanium trichloride, pentaethylcyclopentadienyl titanium trichloride; bis (pentamethylcyclopentadienyl) titanium diphenyl, the carbene represented by the formula bis(cyclopentadienyl)ti tanium=CH2 and derivatives of this reagent; substituted bis(cyclopentadienyl)titanium (IV) compounds such as: bis(indenyl)titanium diphenyl or dichloride, bis(methylcyc lopentadienyl)titanium diphenyl or dihalides; dialkyl, tri -alkyl, tetra-alkyl and penta-alkyl cyclopentadienyl titanium compounds such as bis(1,2dimethylcyclopentadienyl)titanium diphenyl or dichloride, bis(1,2-diethylcyclopentadienyl)titanium diphenyl or dichloride; silicon, phosphine, amine or carbon bridged cyclopentadiene complexes, such as dimethyl silyldicyclope ntadienyl titanium diphenyl or dichloride, methyl phosphine dicyclopentadienyl titanium diphenyl or dichloride, methylenedicyclopentadienyl titanium diphenyl or dichloride and other dihalide complexes, and the like; as well as

bridged metallocene compounds such as isopropyl(cyclopenta

dienyl)(fluorenyl)zirconium dichloride, isopropyl(cyclopen tadienyl) (octahydrofluorenyl)zirconium dichloride diphenylmethylene(cyclopentadienyl)(fluorenyl) zirconium dichloride, diisopropylmethylene (cyclopentadienyl) (fluore nyl)zirconium dichloride, diisobutylmethylene(cyclopentadi enyl)(fluorenyl) zirconium dichloride, ditertbutylmethylene (cyclopentadienyl) (fluorenyl) zirconium dichloride, cyclohexylidene(cyclopentadienyl)(fluorenyl) zirconium dichloride, diisopropylmethylene (2,5-10 dimethylcyclopentadienyl)(fluorenyl)zirconium dichloride, isopropyl(cyclopentadienyl)(fluorenyl) hafnium dichloride, diphenylmethylene (cyclopentadienyl) (fluorenyl)hafnium dichloride, diisopropylmethylene(cyclop entadienyl) (fluorenyl)hafnium dichloride, diisobutylmethy 15 lene(cyclopentadienyl) (fluorenyl)hafnium dichloride, ditertbutylmethylene(cyclopentadienyl) (fluorenyl)hafnium dichloride, cyclohexylidene(cyclopentadienyl)(fluorenyl)ha fnium dichloride, diisopropylmethylene(2,5dimethylcyclopentadienyl) (fluorenyl)hafnium 20 dichloride, isopropyl(cyclopentadienyl)(fluorenyl)titanium dichloride, diphenylmethylene(cyclopentadienyl) (fluorenyl)titanium dichloride, diisopropylmethylene(cyclo pentadienyl) (fluorenyl)titanium dichloride, diisobutylmethylene(cyclopentadienyl) (fluorenyl)titanium 25 dichloride, ditertbutylmethylene(cyclopentadienyl) (fluorenyl)titanium dichloride, cyclohexylidene(cyclopenta dienyl) (fluorenyl)titanium dichloride, diisopropylmethylene(2,5 fluorenyl)titanium dichloride, racemic-ethylene bis (1-indenyl) zirconium (IV) 30 dichloride, racemic-ethylene bis (4,5,6,7-tetrahydro-1-

indenyl) zirconium (IV) dichloride, racemic-dimethylsilyl

bis (1-indenyl) zirconium (IV) dichloride, racemicdimethylsilyl bis (4,5,6,7-tetrahydro-1-indenyl) zirconium (IV) dichloride, racemic-1,1,2,2- tetramethylsilanylene bis (1-indenyl) zirconium (IV) dichloride, racemic-1.1,2,2-tetramethylsilanylene bis (4,5,6,7-tetrahydro-1indenyl) zirconium (IV), dichloride, ethylidene (1-indenyl tetramethylcyclopentadienyl) zirconium (IV) dichloride, racemic- dimethylsilyl bis (2-methyl-4-t-butyl-1cyclopentadienyl) zirconium (IV) dichloride, racemic-10 ethylene bis (1-indenyl) hafnium (IV) dichloride, racemicethylene bis (4,5,6,7-tetrahydro-1-indenyl) hafnium (IV) dichloride, racemic-dimethylsilyl bis (1-indenyl) hafnium (IV) dichloride, racemic-dimethylsilyl (4,5,6,7tetrahydro-1- indenyl) hafnium (IV) dichloride, racemic-15 1,1,2,2tetramethylsilanylene bis (1-indenyl) hafnium(IV) dichloride, racemic-1,1,2,2-tetramethylsilanylene bis (4,5,6,7-tetrahydro-1- indenyl) hafnium (IV), dichloride, ethylidene (1-indenyl-2,3,4,5-tetramethyl-1-20 cyclopentadienyl) hafnium (IV) dichloride, racemicethylene bis (1-indenyl) titanium (IV) dichloride, racemic-ethylene bis (4,5,6,7-tetrahydro-1-indenyl) titanium (IV) dichloride, racemic- dimethylsilyl bis (1indenyl) titanium (IV) dichloride, racemic- dimethylsilyl 25 bis (4,5,6,7-tetrahydro-1-indenyl) titanium (IV) dichloride, racemic-1,1,2,2-tetramethylsilanylene bis (1indenyl) titanium (IV) dichloride racemic-1,1,2,2tetramethylsilanylene bis (4,5,6,7-tetrahydro-1indenyl) titanium (IV) dichloride, and ethylidene (1-30 indenyl-2,3,4,5-tetramethyl-1-cyclopentadienyl) titanium IV) dichloride.

PCT/US96/00644

10

15

20

25

Preferred metallocenes are bis(cyclopentadienyl)titanium dimethyl, isopropyl (cyclopentaienyl) fluroenyl)zirconium dimethyl, bis (1-indenyl) zirconium (IV) dimethyl, (4,5,6,7-tetrahydro-1indenyl) hafnium (IV) dimethyl, dimethylzirconene, dimethyethylenebisindenylzirconium, and dimethylethylene bis(tetrahydroindenyl)zirconium.

The transition metal catalyst useful in this invention can include non-cyclopentadienyl catalyst components (such as pentadienyls) as well as ancillary ligands such as borollides or carbollides in combination with a transition metal.

Transition metal catalyst also include traditional Ziegler-Natta ("ZN") catalysts precursor which are by the formula M'R wherein M' is a transitional metal from the Group 3 through 10 and the Lanthanide Series in the Periodic Table, wherein "a" is its valence state and the number of R's is equal to "a" and each may be the same or different and independently selected from the group consisting of halogens(preferably Cl and Br), alkyls(preferably C1-C20; more preferably ethyl, butyl, octyl and ethylhexyl), alkoxys (preferably C1-C20, more preferably ethoxy, isopropoxy, butoxy and phenoxy), aryls (preferably C6-C20(including substituted aryls), more preferably phenyl, p-tolyl, benzyl, 4-t-butylphenyl, 2,6 dimethylphenyl, 3,5- methylphenyl, 2,4-dimethylphenyl, 2,3-dimethylphenyl groups) and mixtures thereof. For example, TiCl, TiCl, VOCl, VCl, TiPhenyl4, V(OButyl)3, tetramethyl zirconium, tetrabenzylzirconium, tetramethoxyzirconium, tetraethoxyzirconium, 30 tetrabutoxyzirconium, bis(2,5-di-tbutylphenoxy)dimethylzirconium, bis(2,5-di-t5

10

15

20

25

30

butylphenoxy) dichlorozirconium and zirconium bis(acetylacetonate), tetramethyl titanium, tetrabenzyltitanium, tetramethoxytitanium, tetraethoxytitanium, bis(2,5-di-t-butylphenoxy) dimethyltitanium, bis(2,5-di-t-butylphenoxy) dichlorotitanium and titanium bis(acetylacetonate).

The activator of the present invention is preferably used with a metallocene catalyst precursor defined above. It is the combination of the activator and the catalyst precursor that forms the active catalyst. The amount of the present support activator used with a transition metal catalyst precusor is an amount sufficient to provide a molar ratio of the support M, as defined above from reagent MR, to the transition metal in the catalyst ranging from 1:1 to 1:5, preferably 1:1.

#### POLYMERIZATION

The supported catalytic activator according to the present invention can be used in any polymerization technique. Methods and apparatus for effecting such polymerizatin reactions are well known. The supported catalystic activators according to the present invention can be used in similar amounts and under similar conditions to known olefin polymerization catalysts systems.

As used herein, "Polymerization" includes copolymerization and terpolymeriztion and the terms olefins and olefinic monomer includes olefins, alphaolefins, diolefins, strained cyclic, styrenic monomers, acetylenically unsaturated monomers, cyclic olefins alone

- 22 -

or in combination with other unsaturated monomers. While the catalyst system of the present invention is active for this broad range of olefinic monomer feedstock, alpha-olefins polymerizations is preferred, especially the homopolymerization of ethylene or the copolymerization of ethylene with olefins having 3 to 10 carbon atoms.

10

15

20

25

30

5

"Polymerization techniques" for olefin polymerization according the present invention can be solution polymerization, slurry polymerization or gas phase polymerization techniques. Method and apparatus for effecting such polymerization reactions are well known and described in, for example, Encyclopedia of Polymer Science and Engineering published by John Wiley and Sons, 1987, Volume 7, pages 480-488 and 1988, Volume 12, pages 504-541. The catalyst according to the present invention can be used in similar amounts and under similar conditions to known olefin polymerization catalyst.

Typically, for the slurry process, the temperature is from approximately 0 degrees C to just below the temperature at which the polymer becomes swollen in the polymerization medium. For the gas phase process, the temperature is from approximately 0 degrees C to just below the melting point of the polymer. For the solution process, the temperature is typically the temperature from which the polymer is soluble in the reaction medium up to approximately 320 degrees C.

5

10

15

20

25

30

The pressure used can be selected from a relatively wide range of suitable pressures, e.g., from subatmospheric to about 350 Mpa. Suitably, the pressure is from atmospheric to about 6.9 Mpa, or 0.05-10 MPa, especially 0.14-5.5 Mpa. Pressure is dictated by the process and the desired product. In the slurry or particle form process, the process is suitably performed with a liquid inert diluent such as a saturated aliphatic hydrocarbon. Suitably the hydrocarbon is a C, to C, hydrocarbon, e.g., isobutane or an aromatic hydrocarbon liquid such as benzene, toluene or xylene. The polymer is recovered directly from the gas phase process or by filtration or evaporation from the slurry process or evaporation from the solution process.

The supported activator of the present invention are particularly suited for the gas phase or slurry processes.

#### DESCRIPTION OF THE DRAWINGS

Figure 1 is a depiction of the "B Magnetic angle spinning (MAS) Nuclear Magnetic Resonance (NMR) spectrum of  $[B(C_{\epsilon}F_{\epsilon}),]$  physisorbed on a calcined amorphous silica gel (Trace A) and a depiction of the "B MAS NMR of a supported catalytic activator as prepared in Example 1, described below, and depicts the direct chemical bond of the  $[B(C_{\epsilon}F_{\epsilon}),]$  to the oxygen of the amorphous silica gel (Trace B).

The sharp line pattern in Trace B is indicative of a four coordinate boron center, proving  $[B(C_6F_5)_3]$  has reacted chemically with the silica to form a four coordinate borate salt.

- 24 -

#### **EXAMPLES**

The following examples are provided to illustrate the present invention, but are not to be constred as limiting the invention in any way except as provided in the appended claims. All parts and percentages are by weight unless otherwise indicated.

#### Example 1.

5

10

15

20

Preparation of Supported Borate A. Davison Grade 948 silica, a 50 micron average particle size spheriodal silica gel, was calcined in air at 500°C for 4 hours, then transferred to an argon-filled glove box. To a slurry of 5.02 g silica in 50 ml heptane was added 0.5 ml of a 2 Molar solution of "BuLi in hexane. After 30 minutes, 0.518 g of [B(C,F.),] was added. The mixture was stirred for 1 hour, and 0.281 g of Ph,CC1 was introduced. The slurry immediately turned yellow, then darkened to orange over the course of 10 minutes. After 30 minutes, the orange solid was collected on a fitted funnel, washed with toluene and pentane, and dried in vacuo. The solid was analyzed by "B NMR, which confirmed formation of four-coordinate borate species.

#### Example 2.

Preparation of Supported Borate B. The same procedure as reported for Borate A was followed with the following reagents: 2.640 g SRA alumina, 0.25 ml "BuLi, 0.26 g [B(C,F,)], and 0.141g Ph,CC1. The isolated product was a pale brown solid. The solid was analyzed by "B NMR, which confirmed formation of four-coordinate borate species.

Example 3.

30 Preparation of Supported Borate C. To 10.0 g Davison 948 silica in 200 ml heptane were added 10 mmol of a heptane solution of [B(C6F5)3] and 1.3 ml of dimethylaniline. The

solution was heated at reflux for 4 hours, yielding a white solid and a blue filtrate. The solid was analyzed by "B NMR, which confirmed formation of four-coordinate borate species.

## Example 4.

10

Preparation of Polyolefin Catalyst A. 0.245 g Borate A was added to a solution of 0.5 ml of a triethyl aluminum solution (5.6 % Al in heptane) in 50 ml heptane. To the mixture was added 0.0020 g Cp<sub>2</sub>ZrMe<sub>2</sub>. The resulting mixture was heated to 45°C, and 53 psi ethylene was introduced. Polymerization yielded 3.96 g free-flowing polyethylene in 34 minutes, corresponding to an activity of 895 gPE/mmol Zr/hr.

### Example 5.

Preparation of Polyolefin Catalyst B. As above, except 0.150 g borate B, 0.0015 g Cp.ZrMe, were employed. The catalyst yield 1.95 g polyethylene in 23 minutes, corresponding to an activity of 835 gPE/mmol Zr/hr. Example 6.

20 Preparation of Polyolefin Catalyst C. 1 g of Borate C was slurred in 500 ml heptane, and 1 mmol triethylaluminum was added as a heptane solution. To this mixture was added 0.01 g Cp<sub>2</sub>ZrMe<sub>1</sub>. Polymerization at 35 psi ethylene and 40°C yielded 6 g polyethylene in 0.25 hr, corresponding to an activity of 290 gPE/mmolZr/Hr.

- 26 -

#### We claim:

10

15

1. A supported catalyst activator, comprising a four coordinate anion with a direct chemical bond to a catalyst support, wherein said anion species is comprised of a neutral, three coordinate compound, MR, and a support having oxygen containing functionalities, wherein

M is selected from the group comprising boron, tellurium, aluminum, gallium, indium and mixtures thereof;

R's can be the same or different and are selected from the group comprising alkyls, alkoxys, alkenyls, halo-substituted alkyls, alkoxys and alkenyls, aryls, aryl halides, alkoxy and halides and mixtures thereof; and

a cation counter ion to said anion, wherein said cation is a protonated base or a Lewis Acid capable of protonating or abstracting a moiety from a transition metal containing catalyst precursor resulting in a cationic transition metal species.

2. The supported catalyst activator of claim 1, wherein the M is boron, aluminum or mixtures thereof;

the support is selected from the group comprising SiO<sub>2</sub>, Al<sub>2</sub>O<sub>3</sub>, MgO, ZrO<sub>2</sub>, TiO<sub>2</sub>, Fe<sub>2</sub>O<sub>3</sub>, B<sub>2</sub>O<sub>3</sub>, CaO, ZnO, BaO, ThO<sub>2</sub> and aluminum phosphate gel materials and mixtures thereof;

R's can be the same or different and are selected from the group comprising halosubstituted and nonsubstituted C1-C5 alkyls, C6-C18 aryls and mixtures thereof; and

the cation is selected from the group comprising ammonium salts, carboniums, phosphoniums, carbeniusm, oxoniums, tropylium, ferroceniums, silver and mixtures thereof.

15

20

10

3. The supported activator according to claim 1, wherein the M is boron, R is pentafluorophenyl, the support is selected from the group comprising silica, silica alumina, silica alumina titania, silica maganesium chloride, silica titania, aluminium phosphate gel, zeolite, ferrite and mixtures thereof and the cation is selected from the group comprising N,N-dimethylanilinium, triphenylcarbenium and mixtures thereof.

- 28 -

4. A supported catalytic activator comprising a compound of the general formula:

## [C]'['MR,-O-Support],

5

10

15

20

Wherein, [C] is an activating cation, which may be a Bronsted acid capable of donating a proton to the transition metal catalytic precursor resulting in a transition metal cation or an abstracting moiety that is capable of reacting with a transition metal catalytic precursor resulting in the cationic transition metal species and mixtures thereof;

R can be the same or independent and are selected from the group comprising halogens, mono or multi-cyclic aryls, alkyls, alkoxys, and alkenyl compounds, and halosubstituted mono or multi-cyclic aryls, alkyls, alkoxys, and alkenyls compounds and mixtures thereof;

M is selected from the group comprising boron, aluminum, gallium, indium, tellurium and mixtures thereof;

O is oxygen; and

O is oxygen; and

Support is a selected from the group of inorganic carriers, inorganic oxide carriers, and organic carriers.

PCT/US96/00644

10

15

20

5. The supported catalytic activator of claim 4, wherein:

C is selected from the group comprising ammoniums of methylamine, aniline, dimethylamine, diethylamine, N-methylaniline, diphenylamine, trimethylamine, triethylamine, N,N-dimethylaniline, methyldiphenylamine, pyridine, p-bromo-N,N,-dimethylaniline, p-nitro-N,N-dimethylaniline; phosphoniums from triethylphosphine, triphenylphosphine and diphenylphosphine; oxoniums from dimethyl ether, diethyl ether tetrahydrofuran and dioxane; sulfoniums from thioethers such as diethyl thioethers and tetrahydrothiophene; silver, tropylium, carbeniums, ferroceniums and mixtures thereof and mixtures of two or more of the foregoing;

R's are the same or different and are selected from comprising chlorine, bromine, and halosubstituted and nonsubstituted C1-C20 alkenyls, C1-C20 alkyls, C6-C20 aryls, C1-C20 alkoxy and and mixtures thereof;

M is selected from the group comprising boron, aluminium and mixtures thereof; and

Support is selected from the group comprising SiO,, Al,O,, MgO, ZrO,, TiO,, Fe,O,, B,O,, CaO, ZnO, BaO, ThO, and aluminum phosphate gel materials and mixtures thereof.

PCT/US96/00644

15

6. The supported activator of claim 5, wherein the C' is N,N-dimethylanilinium, triphenylcarbenium, and mixtures thereof;

R's are the same or different and are selected from the group comprising chlorine, bromine, and halosubstituted and nonsubstituted ethenyl, propylenyl, butenyl, pentenyl, methyl, ethyl, n-propyl, iso-propyl, n-butyl, n-octyl, and 2-ethylhexyl, phenyl, p-tolyl, benzyl, 4-t-butylphenyl, 2,6 dimethylphenyl,

pentaflurophenyl, 3,5- methylphenyl, 2,4-dimethylphenyl, 2,3-dimethylphenyl, pentafluorobenzyl, napthyl, ethoxy, butoxy, t-butoxy, n-butoxy and mixtures thereof; and

Support is selected from the group comprising silica, silica alumina, silica alumina titania, silica maganesium chloride, silica titania, aluminium phosphate gel, zeolite, ferrite and mixtures thereof.

- 31 -

7. A method for preparing a supported catalyst activator comprising an anion chemically bound to a catalyst support having oxygen functionalties on the surface, said method comprising:

7

10

15

20

25

30

- treating a catalyst support with a C1-C20 1) metal alkyl, C6-C20 metal aryl, substituted C1-C20 metal alkyls and aryls and mixtures thereof, and where the metal in this reagent is selected from the group comprising Group 1 and 2 metals from the Periodic table and mixtures thereof, wherein such reagent can react with the support surface to generate nucleophilic oxygen sites; adding a neutral, three coordinate metal 2) component, MR, wherein the M is selected from the group comprising of boron, tellurium, aluminum, gallium and indium and mixtures thereof and the R's are the same or different and are selected from the group consisting of halogens, mono or multi-cyclic aryls, alkyls, alkoxys and alkenyl compounds and halosubstituted mono or multi-cyclic aryls,
- from the group represented by the formula R'X wherein the R' is selected from the group of hydrogen, alkenyl, alkyl, aryl or arylalkyl radical having from 1-20 carbons or two carbon atoms joined together to form a C4 to C6 ring, and X is any halogen; pronated amides, ammonium and mixtures thereof.

alkoxys alkyls, and alkenyl compounds mixtures

thereof:

- 32 -

8. The method according to claim 7, wherein the method further comprises a support that is selected from the group comprising SiO<sub>2</sub>, Al<sub>2</sub>O<sub>3</sub>, MgO, ZrO<sub>2</sub>, TiO<sub>2</sub>, Fe<sub>2</sub>O<sub>3</sub>, B<sub>2</sub>O<sub>3</sub>, CaO, ZnO, BaO, ThO<sub>2</sub> and aluminum phosphate gel materials and mixtures thereof;

5

the metal containing reagent of step 1) is selected from the group comprising N-butyllithium, dibutylmagnesium, methyllithium, butylmagnesium chloride and mixture thereof;

the MR<sub>3</sub> of step 2) is selected from the group comprising tri(phenyl)boron, tri(p-tolyl)boron, tri(o-tolyl)boron, tri(pentafluorophenyl)boron, tri(o,p-dimethylphenyl)boron, tri(m,m-di(trifluoromethyl) phenyl)boron, tri(p-trifluoromethylphenyl)boron, tri(phenyl)aluminum, tri(p-tolyl)aluminum, tri(o-tolyl)aluminum, tri(pentafluorophenyl)aluminum, tri(o,p-dimethylphenyl)aluminum, tri(m,m-di(trifluoromethyl)phenyl)aluminum, tri(p-trifluoromethylphenyl) aluminum, and the like; and mixtures of the foregoing; and

the organic compound in step 3) is selected from the group comprising chlorotriphenylmethane, dimethylanilinium chloride and mixtures thereof.

5

10

25

30

- 9. A method for preparing a supported catalyst activator, comprising an anion species chemically bound to a catalyst support, said method comprising:
  - treating a catalyst support with an organic base in solution, and
  - 2) adding a neutral material, MR, wherein the M is selected from the group comprising boron, tellurium, aluminum, gallium, indium and mixtures thereof, and the R's are the same or different and selected from the group comprising halogens, alkyls, alkenyls, alkoxyls, halogen substituted alkyls, alkoxyls and alkenyls, aryl, aryl halides, and mixtures thereof.
- 10. The method according to claim 9, wherein the method further comprises an organic base in step 1) that is an organic base having the general formula having the formula RN, wherein the N is nitrogen and the R's are independently selected from the group comprising hydrogen, alkyl, aryls, substituted alkyls and aryls, and may be the same or different; and

the Support is selected from the group comprising SiO<sub>2</sub>, Al<sub>2</sub>O<sub>3</sub>, MgO, ZrO<sub>2</sub>, TiO<sub>2</sub>, Fe<sub>2</sub>O<sub>3</sub>, B<sub>2</sub>O<sub>3</sub>, CaO, ZnO, BaO, ThO, and aluminum phosphate gel materials and mixtures thereof.

11. The method according to claim 10, wherein the method further comprises an organic base in step 1) is selected from the group comprising dimethylaniline, tributylamine, triethylamine and mixtures thereof.

- 34 -

12. An activated catalyst composition comprising the supported catalyst activator according to claim 1 and at least one cationic transition metal species derived from one or more stabilized transition metal compounds.

5

13. An activated catalyst composition comprising the supported catalyst activator according to claim 2 and at least one cationic transition metal species derived from one or more stabilized transition metal compounds.

10

14. An activated catalyst composition comprising the supported catalyst activator according to claim 3 and at least one cationic transition metal species derived from one or more stabilized transition metal compounds.

15

15. An activated catalyst composition comprisingt the supported catalyst activator according to claim 4 and at least one cationic transition metal species derived from one or more stabilized transition metal compounds.

20

16. An activated catalyst composition comprising the supported catalyst activator according to claim 5 and at least one cationic transition metal species derived from one or more stabilized transition metal compounds.

25

17. An activated catalyst composition comprising the supported catalyst activator according to claim 6 and at least one cationic transition metal species derived from one or more stabilized transition metal compounds.

30

18. The composition according to claims 12-17, wherein the cationic transition metal species is derived

- 35 -

from a metallocene, Ziegler-Natta compounds and mixtures thereof.

- 19. The composition according to claim 12-17, wherein the cationic transition metal species contains a metal selected from the group comprising titanium, hafnium, zirconium and mixtures thereof.
- 20. A process for polymerizing olefinic monomer

  material comprising contacting at least one olefinic

  monomer with at least one catalyst activator defined by

  claims 1-12, in the presence of at least one olefin

  catalytic transition metal precursor in a reaction zone at

  a temperature and for a time sufficient to polymerize at

  least a portion of the olefin to a polyolefin.

PCT/US96/00644

The process according to claim 20, wherein the 21. catalytic precusor is selected from the group comprising bis(cyclopenta-dienyl)titanium dimethyl, isopropyl(cyclopentaienyl)fluroenyl)zirconium dimethyl, bis (1-indenyl) zirconium (IV) dimethyl, (4,5,6,7-5 tetrahydro-1-indenyl)hafnium(IV)dimethyl, dimethylzirconene, dimethyethylenebisindenylzirconium, and dimethylethylene bis(tetrahydroindenyl)zirconium, phenyl, p-tolyl, benzyl, 4-t-butylphenyl, 2,6 dimethylphenyl, 3,5- methylphenyl, 2,4-dimethylphenyl, 10 2,3-dimethylphenyl groups) and mixtures thereof. For example, TiCl, TiCl, VOCl, VCl, TiPhenyl4, V(OButyl)3, tetramethyl zirconium, tetrabenzylzirconium, tetramethoxyzirconium, tetraethoxyzirconium, tetrabutoxyzirconium, bis(2,5-di-t-15 butylphenoxy)dimethylzirconium, bis(2,5-di-tbutylphenoxy)dichlorozirconium and zirconium bis(acetylacetonate), tetramethyl titanium, tetrabenzyltitanium, tetramethoxytitanium, tetraethoxytitanium, tetrabutoxytitanium, bis(2,5-di-t-20 butylphenoxy)dimethyltitanium, bis(2,5-di-tbutylphenoxy)dichlorotitanium and titanium bis(acetylacetonate) and mixtures thereof.


25

22. The process according to claim 20, wherein the reaction zone occurs in a slurry, solvent or gas phase polymerization reactor.

- 37 -

23. A polymer formed by polymerizing olefinic monomer material in the presence of at least one catalyst activator according to claims 1-12 and at least one olefin catalyst.

5

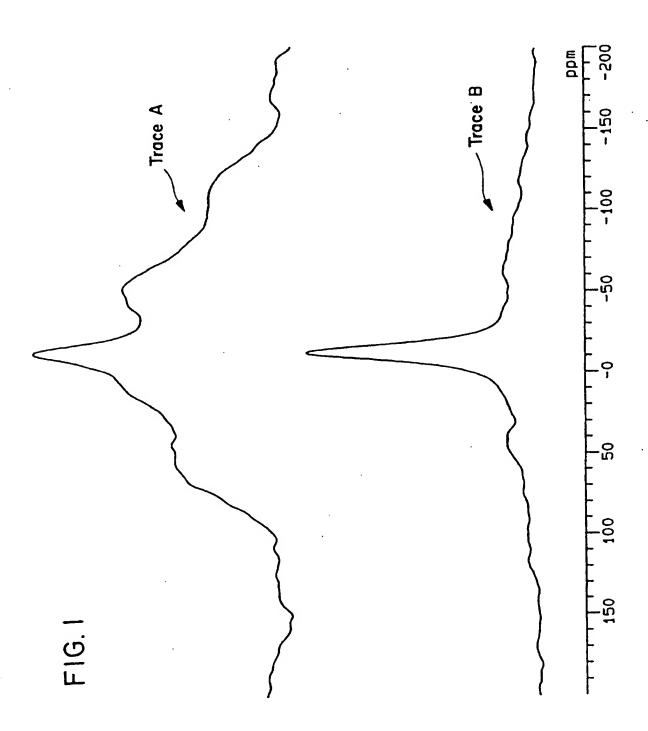

## INTERNATIONAL SEARCH REPORT

Inter nal Application No PCT/US 96/00644

		T	701/03 30/00044
A. CLASS IPC 6	COSF4/60 COSF10/00		-
According t	o International Patent Classification (IPC) or to both national c	lassification and IPC	
	SEARCHED		
Minimum d IPC 6	ocumentation searched (classification system followed by class)	(ication symbols)	
Documental	tion searched other than minimum documentation to the extent t	that such documents are include	ed in the fields searched
Electronic d	lata base consulted during the international search (name of data	a base and, where practical, sea	rch terms used)
٠			
C. DOCUM	MENTS CONSIDERED TO BE RELEVANT		Datament on atains No.
Category *	Citation of document, with indication, where appropriate, of t	he relevant passages	Relevant to claim No.
X	WO,A,93 11172 (EXXON CHEMICAL 10 June 1993 cited in the application see page 18, lines 21-22, and line 20 to page 38, line 14		1-6, 12-23
A	WO,A,91 09882 (EXXON CHEMICAL 11 July 1991 see claim 9; page 16, line 9 to line 14; page 22, lines 20-30; 10, 12, 14	1-23	
A	WO,A,94 03506 (EXXON CHEMICAL 17 February 1994 cited in the application see page 5, lines 33-35, and plines 6-14		1-23
			}
		-/	
X Furt	ther documents are listed in the continuation of box C.	X Patent famuly me	mbers are listed in annex.
"A" docum connec "E" earlier filling "L" docum which citatio "O" docum other "P" docum	nent defining the general state of the art which is not dered to be of particular relevance.  document but published on or after the international date the state of the state of another or is cited to establish the publication date of another on or other special reason (as specified) ment referring to an oral disclosure, use, exhibition or means.  Sent published prior to the international filing date but than the priority date claimed.	or priority date and increted to understand to invention  "X" document of particul cannot be considered involve an inventive document of particul cannot be considered document is combinated, such combinatin the art.  "&" document member of	
	e actual completion of the international search  29 May 1996	Date of mailing of th	e international search report
	mailing address of the ISA  European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Td. (+31-70) 340-2040, Tx. 31 651 epo nl,	Authorized officer  Mergoni,	

# INTERNATIONAL SEARCH REPORT

Inter mal Application No
PCT/US 96/00644

C(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT  Category*  Citation of document, with indication, where appropriate, of the relevant passages  E WO,A,96 04319 (EXXON CHEMICAL PATENTS INC ;WALZER JOHN FLEXER JR (US)) 15 February 1996  see claims  1.	4 
WO,A,96 04319 (EXXON CHEMICAL PATENTS INC ;WALZER JOHN FLEXER JR (US)) 15 February 1996	to claim No
;WALZER JOHN FLEXER JR (US)) 15 February 1996	to ciaim No.
	-23

# INTERNATIONAL SEARCH REPORT

Inter mal Application No
PCT/US 96/00644

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
WO-A-9311172	10-06-93	CA-A- EP-A- JP-T- US-A-	2124187 0614468 7501573 5427991	10-06-93 14-09-94 16-02-95 27-06-95
WO-A-9109882	11-07-91		122688 643255 7181191 2072752 59019535 69019535 0507876 0627448 2072598	15-06-95 11-11-93 24-07-91 03-07-91 22-06-95 19-10-95 14-10-92 07-12-94 16-07-95
WO-A-9403506	17-02-94	CA-A- EP-A- JP-T-	2141814 0702700 7509752	17-02-94 27-03-96 26-10-95
WO-A-9604319	15-02-96	AU-B-	3204695	04-03-96